



Cannon Equipment Dairy Systems

DUAL AND SINGLE CASE WASHER

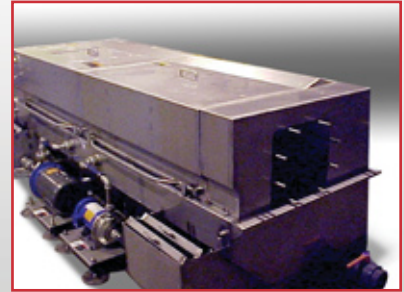

Single Infeed Case Washer

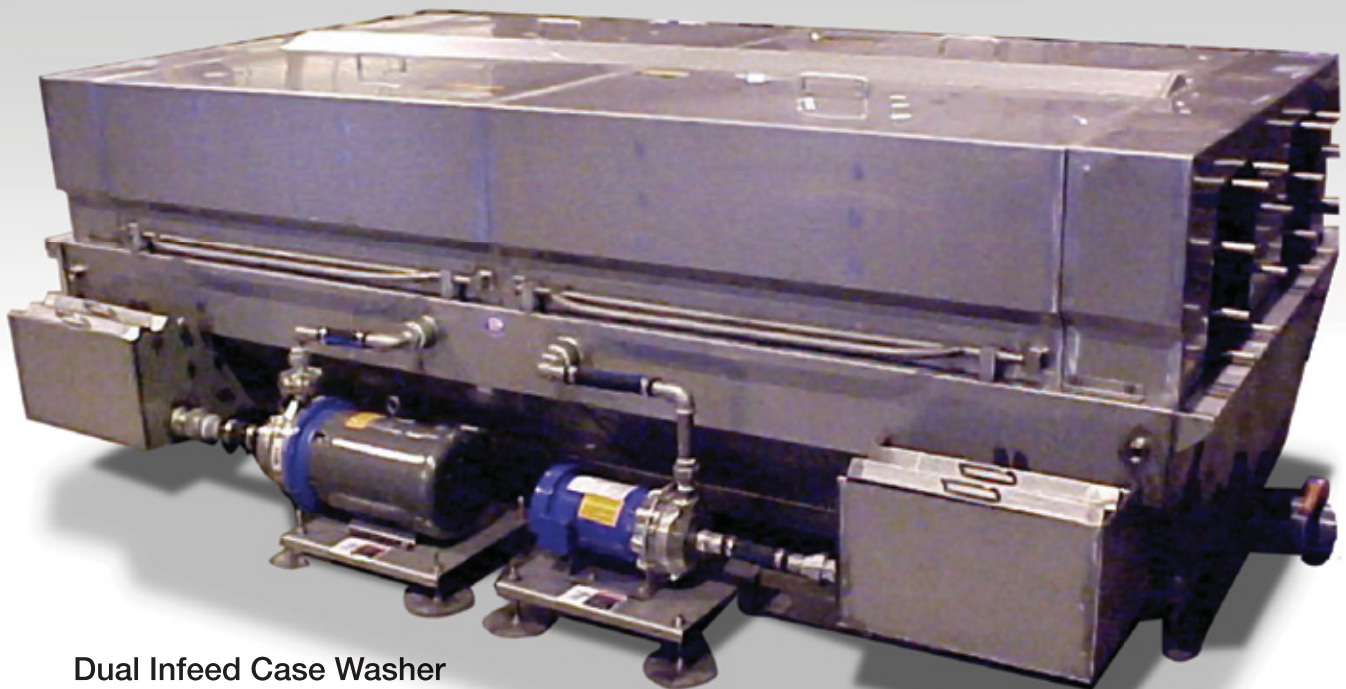

Dual Infeed Case Washer

Case Washer Specifications

Dual and Single Infeed Case Washer 10' 6"

Features:

- Stainless steel construction. Tanks and filter housings are 14 gauge with 18 gauge covers
- Stainless steel slide section through washer is standard
- Separate wash and rinse tanks minimize contamination of rinse water
- Wash and rinse water levels are maintained automatically with mechanical float valves
- Pull out mesh filter screens in the wash & rinse tanks are cleanable and minimize debris entering the pumps or spray nozzles
- 3" npt tank drain ports on each end of tank for quick maintenance
- 1-1/2" npt steam injection pipe supplied. Steam connection and controls provided by others
- Wash and rinse spraybars are stainless steel w/ brass high flow adjustable spray nozzles

- Wash spray nozzle pressure rated up to 70 p.s.i.
- Full canopy with hinged access doors
- All controls, including motor starters are by others.
- Infeed case elevation range is 23" to 30"
- Operating speed is dependant on case infeed speed and degree of cleaning desired by the customer

Available Options

- Stainless steel enclosure w/motor starters for pumps only
- Stainless steel drag chain section through washer w/return tubes as part of tank
- Wheel drive case feed

Utility Requirements:

Electrical:

Wash pump: 10hp, 230 / 460 volt, 3 phase, 40/20 amp (dual)
7.5hp, 230 / 460 volt, 3 phase, 40/20 amp (single)

Rinse pump: 2hp, 230 / 460 volt. 3 phase, 12 / 6 amp

Controls: 120 volt, single phase, 20 amp (by others)

Steam: Estimated 800 lb / hour startup (704.000 btu)

Estimated 400 lb / hour running (352.000 btu)

Steam supply and control by others.

Wash tank: 120 gallon capacity (dual)

110 gallon capacity (single)

Wash water makeup: 3/4" n.p.t. Port

Rinse tank: 80 gallon capacity (dual)

75 gallon capacity (single)

Rinse water makeup: 3/4" n.p.t. Port

Hood vent: steam venting by others.

Weight: machine only – 3000 lbs Water capacity – 3000 lbs

13" x 13" x 11" Plastic Dairy Case

Outside dimension: (measured at corners)

Max. 13-1/8" x 13-1/8" Min. 12-7/8" x 12-7/8"

Inside dimension: (measured at corners)

Max. 12-1/4" x 12-1/4" Min. 12-0" x 12-0"

Side bow:

Max. per side 1/16" Max. outside 13-1/4"


Min. inside 11-7/8"

Height:


Measured on a flat surface 10-3/4" to 11-1/2"




Top View,
Guards Off

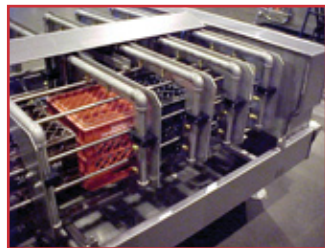

Side View, Guards Off

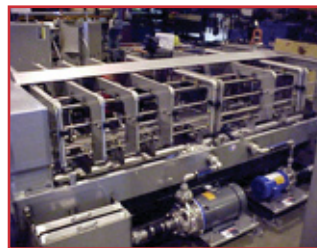

Side View, Guards Off

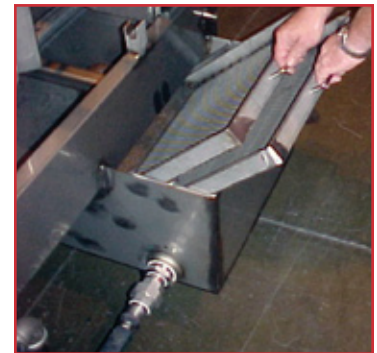

Easy Access Sludge Filters

Materials and specifications are subject to change without notice.

To learn more about Cannon Equipment and our Dairy Systems – custom or stock, call us today at 866-928-9116

 **cannon**
EQUIPMENT

15100 Business Parkway
Rosemount, MN 55068

324 W Washington
Cannon Falls, MN 55009

950 Riverside Drive
Chattanooga, TN 37401

3010 Old Ranch Parkway, Suite 200
Seal Beach, CA 90740

866-928-9116 • www.CannonEquipment.com • email: info@CannonEquipment.com